

Product Highlights

True Gigabit Speed

Enjoy lightning-fast Gigabit speeds without having to install a new network card simply by using any available USB Type-C port on your device

Full-Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution and VGA video up to 1080p @ 60 Hz Full HD for stunning videos and images with no lag

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0, one USB 3.0 port supports BC1.2

Dual-Slot SD Card Reader

Dual-slot SD card reader is compatible with both SD and microSD cards



DUB-M910

9-in-1 USB-C Hub with HDMI/VGA/Ethernet/Card Reader/Power Delivery

Features

Gigabit Ethernet Connectivity

- Achieve transfer speeds of up to 1 Gbps
- Status LEDs for connection status and data transfer speed
- Auto 10/100/1000 Mbps speed detection with auto-negotiation to always use the highest available speed

HDMI Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

VGA Compatibility

- Full HD video resolution up to 1080p @ 60 Hz

SD Card Compatibility

- SD card & microSD card
- SD, SDHC, SDXC (UHS-I mode)

USB Type-C with Simple Installation

- Two USB 3.0 SuperSpeed 5 Gbps ports
- Two USB Type-C ports. One port supports power delivery of up to 100 W and another port supports data sync
- One USB 3.0 port supports Quick Charge BC1.2
- Simply plug-and-play, no software required

The DUB-M910 9-in-1 USB-C Hub with HDMI/VGA/Ethernet/Card Reader/Power Delivery allows you to instantly add a second display, a SD card reader, a Gigabit Ethernet port, two USB 3.0 ports (with one that can quick-charge), as well as a USB Type-C port with charging ability to your ultra-portable computer. Just plug the DUB-M910 into any available USB Type-C port and you're ready to send content to your TV or monitor in full resolution. You can also connect up to two more USB devices, as well as insert a microSD or regular SD card, giving you direct access to your photos on memory cards from your cameras.

Fully-Featured HDMI and VGA Video Connectivity

The DUB-M910 9-in-1 USB-C Hub with HDMI/VGA/Ethernet/Card Reader/Power Delivery plugs into any available USB Type-C or Thunderbolt 3 port on your computer and enables you to connect to a HDMI display with a resolution of up to 4K at 30 frames per second. It also allows you connect to a VGA display or projector with a resolution of up to 1080p at 60 frames per second.


Gigabit Ethernet Connectivity

The DUB-M910 plugs into any available USB Type-C port on your computer to enable you to connect to a Gigabit Ethernet network. High-speed Gigabit Ethernet allows you to transfer large files in no time, or make light work of backups to a server or network storage device. Where wireless connectivity is inconsistent or unavailable, this adapter offers a seamless wired alternative.

Easy to Use

The DUB-M910 connects to your computer's USB Type-C port and is ready to run as soon as it's plugged in. The plug-and-play design ensures that there is no need to change any configuration settings or install any additional software for your computer. For extra convenience, the adapter's compact design means that you can easily slip the DUB-M910 into your pocket or laptop bag and take it with you.

Hardware Overview

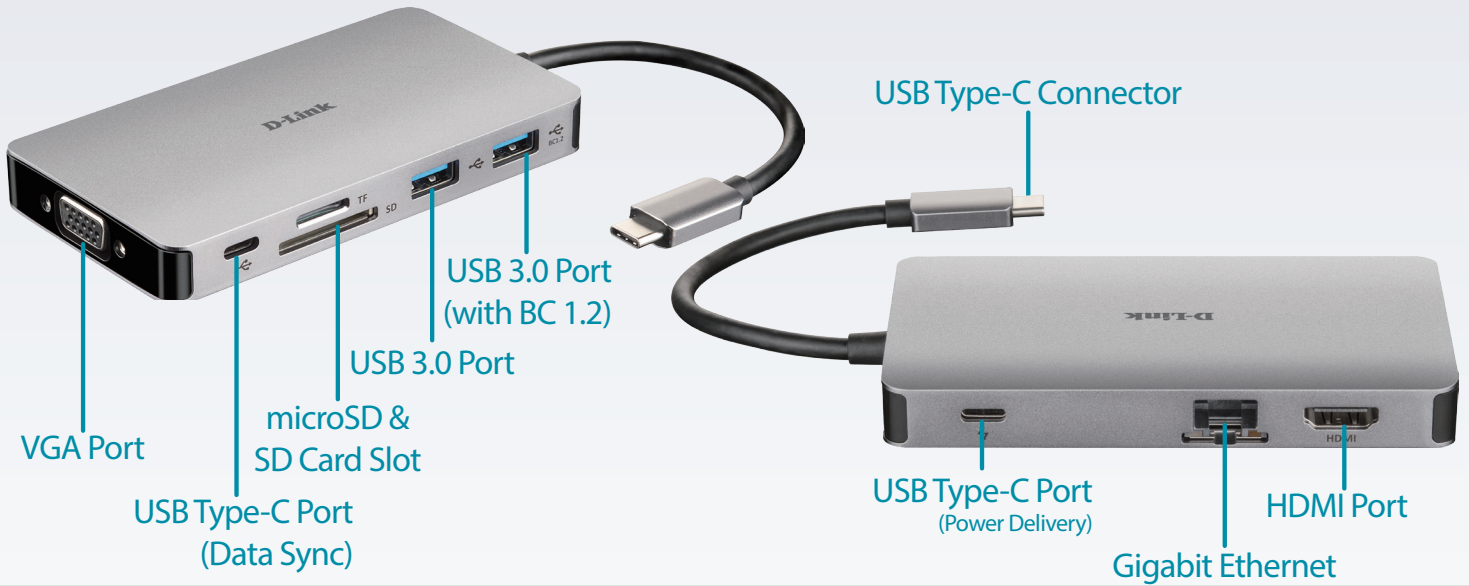

Technical Specifications

Connectivity

Device Interfaces

- USB Type-C Connector (Thunderbolt 3 compliant)
- HDMI Port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz)
- VGA Port (up to 1920 x 1080 pixels @ 60 Hz)
- microSD and SD card slots
- Two USB 3.0 ports (One port supports BC 1.2)
- RJ-45 Gigabit Ethernet Port (10/100/1000 Mbps)
- Two USB Type-C ports:
 - Data sync
 - Power delivery (up to 100 W (20V @ 5A))

Standards

- USB Specification Version 3.0
- USB Specification Version 2.0
- USB Specification Version 1.1
- Quick Charge BC 1.2
- SD, SDHC, SDXC (UHS-I mode)
- HDMI 1.4
- HDCP 2.2
- DisplayPort Alternate Mode
- OHCI (Open Host Controller Interface)
- EHCI (Enhanced Host Controller Interface)
- IEEE 802.3 Ethernet
- IEEE 802.3u Fast Ethernet
- IEEE 802.3ab Gigabit Ethernet
- IEEE 802.3x Full Duplex and Half Duplex
- IEEE 802.3az Wake-On-LAN Support

General

Minimum System Requirements

- Computer running Microsoft Windows[®] OS, Mac OS[®], or Chrome OS[™]
- A USB Type-C Port with DisplayPort Alternate Mode support

Physical

Dimensions (W x H x D)

- 110 x 59 x 14 mm (4.33 x 2.32 x 0.55 in)
- Cable length: 150 mm (5.91 in)

Weight

- 104.0 g (3.67 oz)

Power

- Input: Bus-powered
- Consumption: 80 mA, 5V DC

Temperature

- Operating: 0 to 45 °C (32 to 113 °F)
- Storage: -10 to 70 °C (14 to 158 °F)

Humidity

- Operating: 10% to 90% RH, non-condensing
- Storage: 10% to 90% RH, non-condensing

Certifications

- CE
- IC
- FCC
- RCM

Order Information

Part Number

Description

DUB-M910

9-in-1 USB-C Hub with HDMI/VGA/Ethernet/Card Reader/Power Delivery

Updated July 30, 2019

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.